
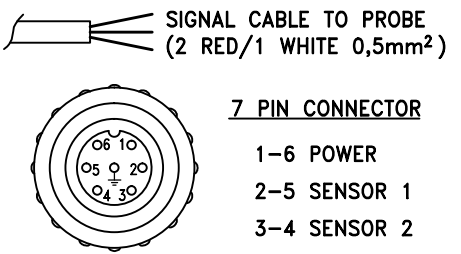


ELECTRICAL INSTALLATION

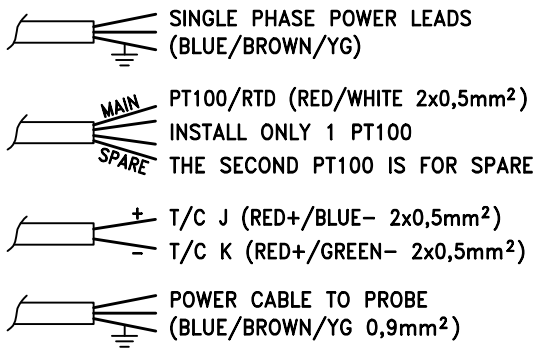

READ CAREFULLY THE INSTALLATION INSTRUCTIONS

COMPILARE A CURA DEL CLIENTE TO BE SPECIFIED BY CUSTOMER

AMBIENT TEMPERATURE MIN/MAX °C	
CONTROLLED OPERATING TEMPERATURE °C	
UNCONTROLLED (SELF LIMITING) OPERATING TEMPERATURE °C	
HEATED LENGTH (L) mm	(A) mm
SENSOR TYPE: PT100/RTD <input type="checkbox"/> T/C J <input type="checkbox"/> T/C K <input type="checkbox"/>	
SENSOR POSITION (B) mm INTO THE SAMPLE LINE	
SAMPLE TUBE PTFE <input type="checkbox"/> PFA <input type="checkbox"/> 316L <input type="checkbox"/>	
SAMPLE TUBE I.D./O.D. 4/6 <input type="checkbox"/> 4,35/6,35 <input type="checkbox"/> 6/8 <input type="checkbox"/> 8/10 <input type="checkbox"/> 10/12 <input type="checkbox"/>	
REPLACEABLE SAMPLE TUBE I.D./O.D mm	
NUMBER OF HEATED SAMPLE TUBE (MAX 3 TUBES)	
CALIBRATION TUBE (OPTION) PTFE <input type="checkbox"/> PFA <input type="checkbox"/> I.D./O.D mm	
BENDING RADIUS mm	
POWER LEADS mm	
MAX OPERATING PRESSURE bar	
POWER SUPPLY V	<input type="checkbox"/> SINGLE PHASE W/m.....
POWER SUPPLY V	<input type="checkbox"/> 3 PHASE W/m.....
THERMAL INSULATION <input type="checkbox"/> CLOSED CELLS SILICONE SPONGE	
<input type="checkbox"/> POLYESTER FELT	
<input type="checkbox"/> GLASS FIBRE FELT	

REV.	CHANGE	DATE	VERIFIED	DRAWN UP
1	REV	05/04/19		
2	REV	25/02/20		

RACO
 NOVATE MILANESE (MI)
 ITALY
 info@racosas.com

Property of RACO sas no reproduction allowed.
 Proprietà RACO sas riproduzione vietata.

TITLE
HEATED SAMPLE GAS LINE IP55 WITH REPLACEABLE TUBE

ORDER CUSTOMER

SHEET	DOC NO
1	
NEXT	DWG/FILE
0	1_2.2
SCALE	